



Variable Optical Attenuator (VOA)

Features:

- * Wide Wavelength range
- * Wide attenuation range
- * High precision
- * High stability and reliability

Applications:

- *Optical Network
- *Telecom Munication
- * Systems Testing
- *Laboratory R&D

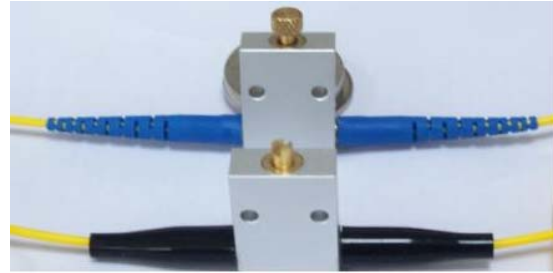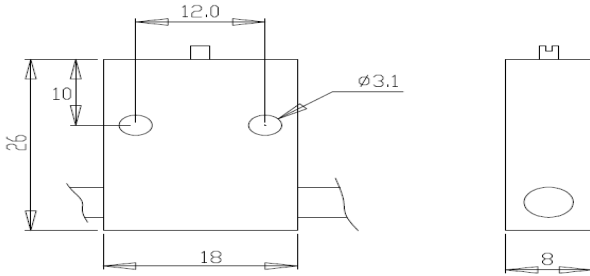

Performance Specifications

Type \ Parameter	1310	1550	1310/1550 Dual window	850 / 1310
Wavelength (nm)	1310 ± 50	1550 ± 50	1260~1650	850± 40 or 1310 ± 40
Attenuation range (dB)	0.6 ~ 60	0.6 ~ 60	0.8 ~ 60	0.8 ~ 40
Original loss (dB)	≤0.6	≤0.6	≤0.8	≤0.8
Return loss (dB)	≥ 50			≥ 30
Adjustment Precision (dB)	0.02			
Fiber type	SMF-28e			50/125 or 62.5/125 multi-mode
PDL (dB)	≤0.15			
Dimensions (mm)	26×18×8			
Operating temperature (°C)	0 ~ +70			
Storage temperature (°C)	-40 ~ +85			

*The above specification is without connector.

**Other specifications can be made on customer request.

Product Ordering Information:

VOA-C-X- XX-X-X-XX/XXX

